





SC-LOCKER-12

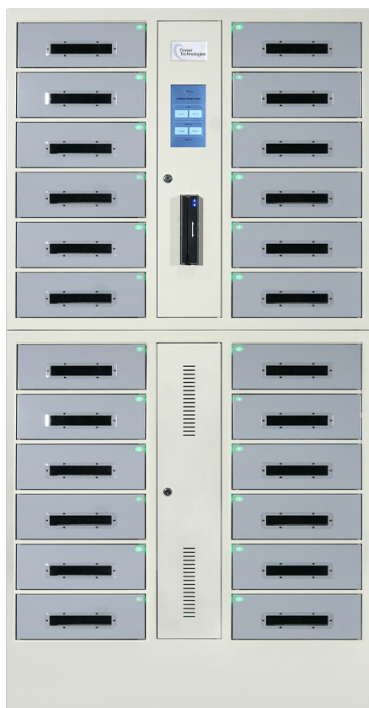

SC-LOCKER-24

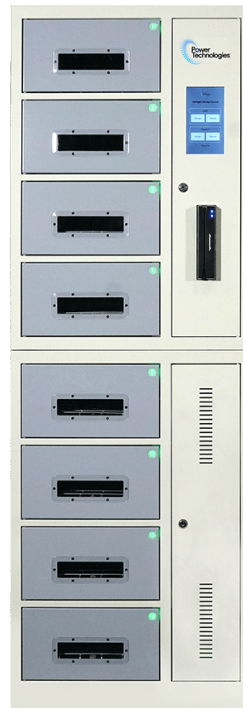

CSC-LOCKER-8




CSC-LOCKER-16

# AC/SC/CSC-LOCKER

## 8/12/16/24 BAY SECURE RFID CHARGING LOCKERS USER MANUAL


**Step-1:** Press “Storage” under CARD.

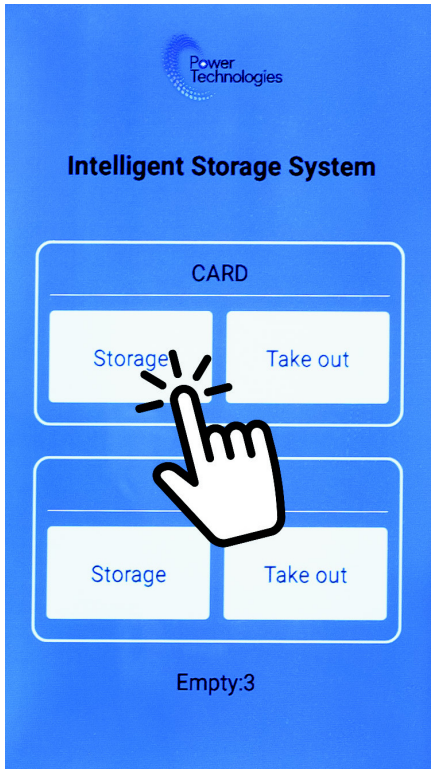

**Step-2:** Place or swipe CARD on Card Reader



**Step-3:** Press “Take out” under CARD

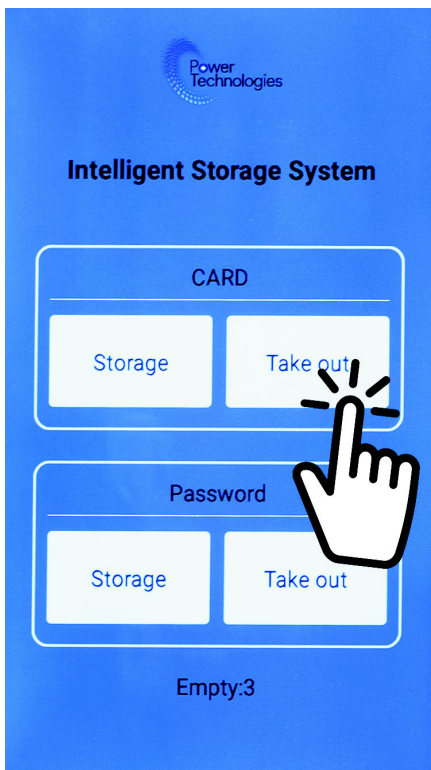


**Step-4:** Place or swipe CARD on Card Reader



# Quick Start: Operation With Passcode


**Step-1:** Press “Storage” under Password.

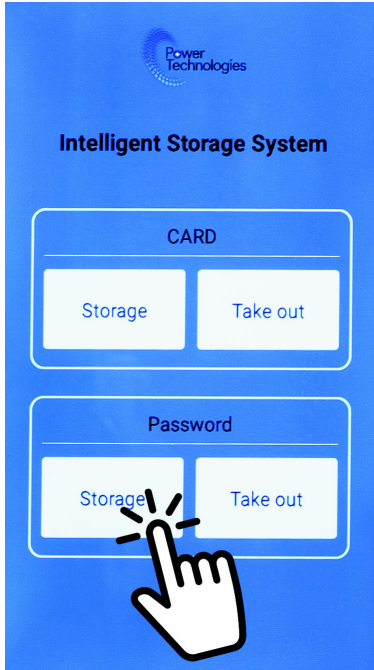


**Step-2:** Input a 4-Digit Password




**Step-3:** Press “Take out” under Password

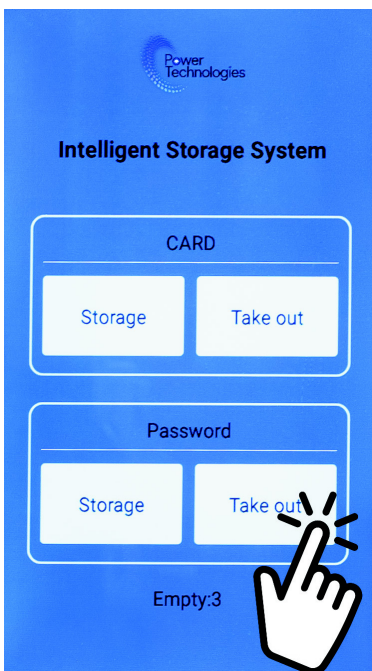


**Step-4:** Press the bay you would like to access

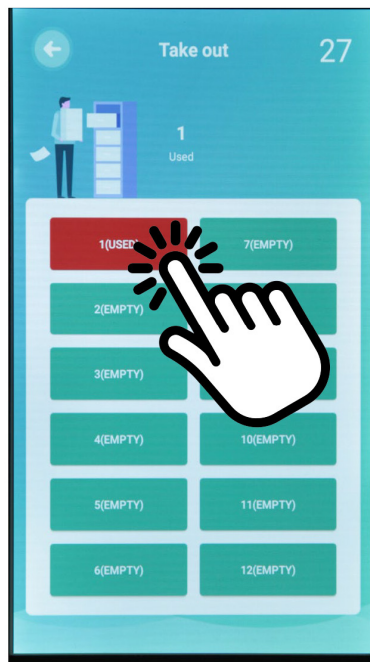


**Step-5:** Input your Password

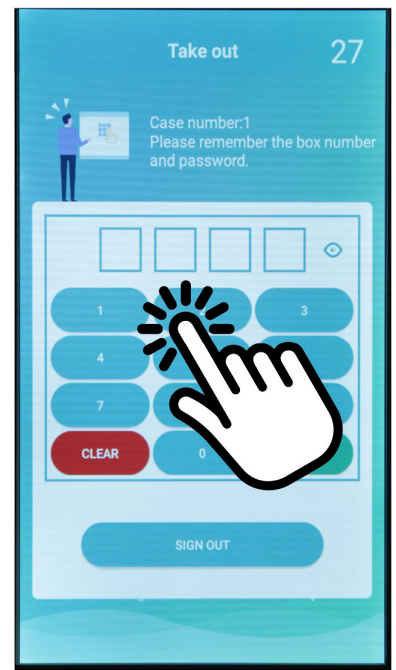


**Step-1:** Press & hold the top left corner for 3 seconds

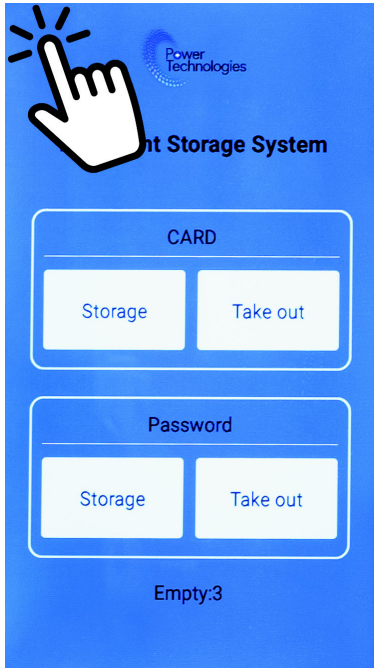

**Step-2:** Enter the Admin Password ([support@powertechologies.com](mailto:support@powertechologies.com) for your Factory Default Password)

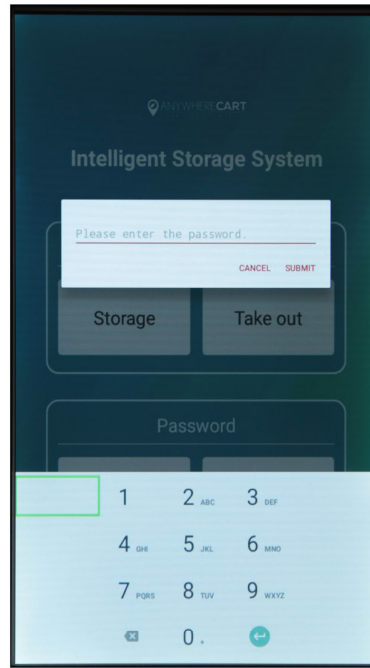


**Step-3:** Access settings by pressing "Gear" icon

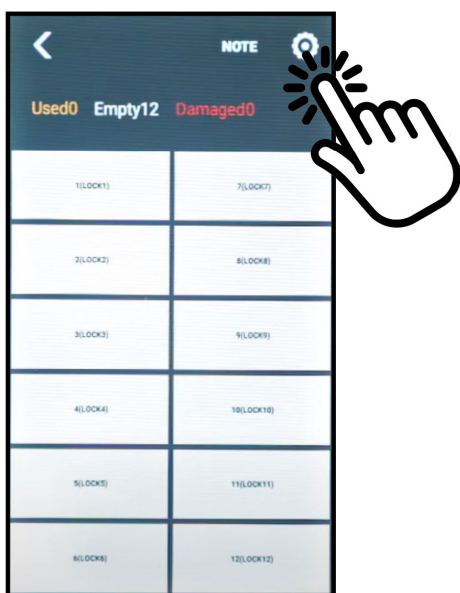


**Step-4:** Press "PASSWORD"




**Step-5:** Input both old & new Passwords

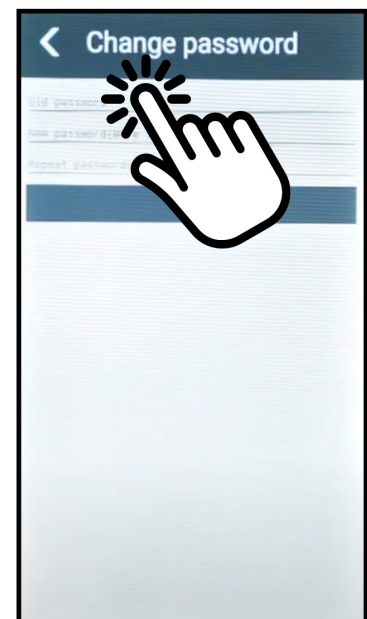

**Step-1:** Press & hold the top left corner for 3 seconds

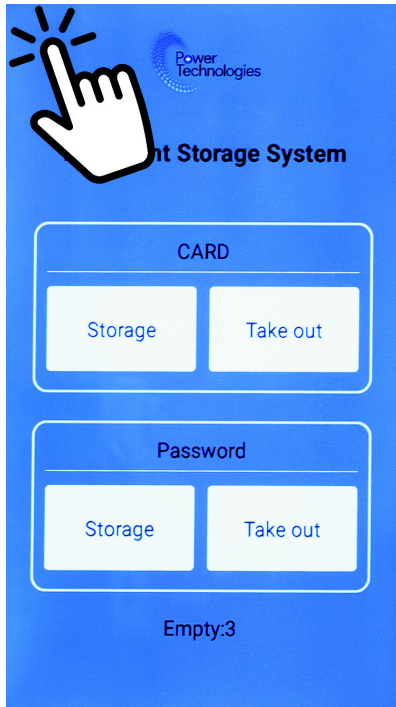


**Step-2:** Enter your Admin Password

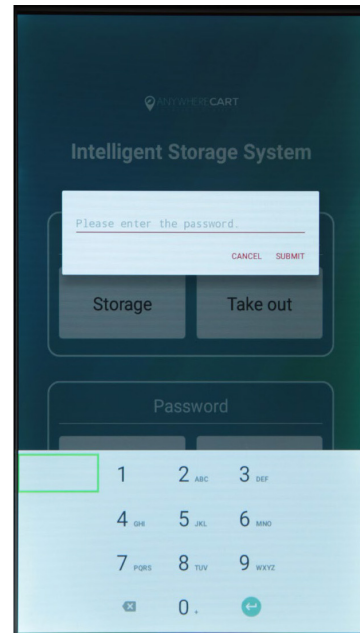


**Step-3:** View log by pressing “NOTE” icon




**Step-4:** Review Access Data

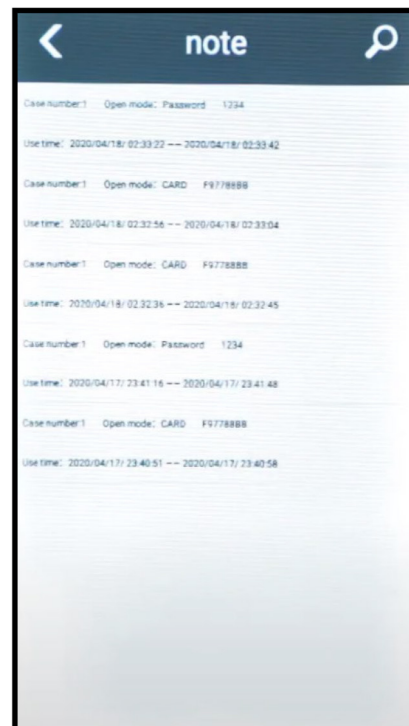


**Step-1:** Press & hold the top left corner for 3 seconds

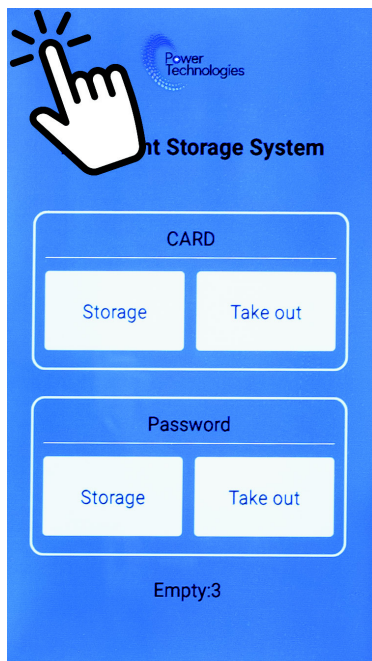


**Step-2:** Enter your Admin Password

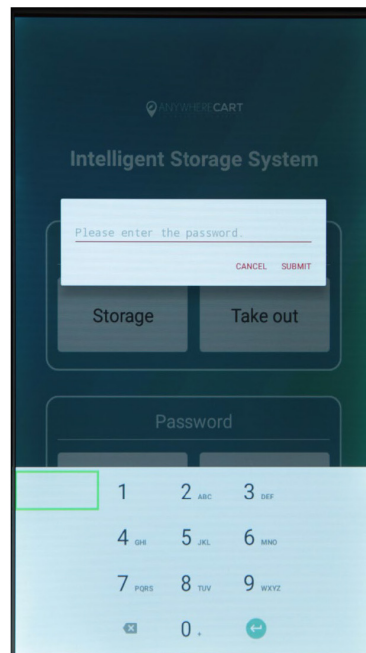

**Step-3:** Press the Bay you would like to modify

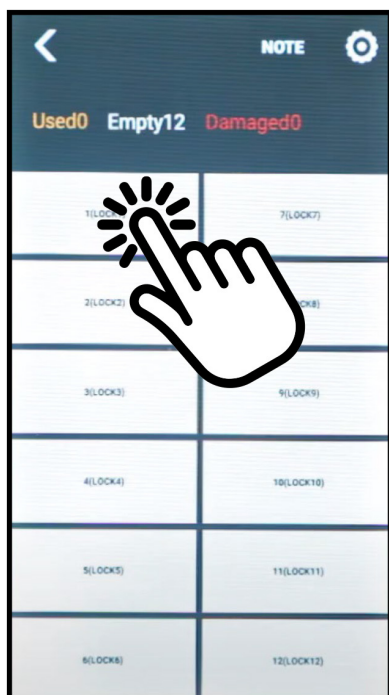

**Step-4:** Adjust parameters

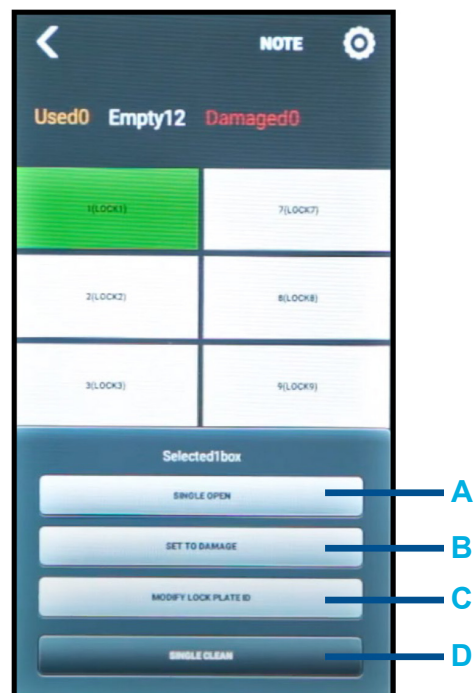


**A-** SINGLE OPEN Opens Bay once

**B-** SET TO DAMAGE Marks Bay as Damaged and inaccessible by users


**C-** MODIFY LOCK PLATE ID Allows Bay to be named

**D-** SINGLE CLEAN Clears Bay Access Data


**Step-1:** Press & hold the top left corner for 3 seconds

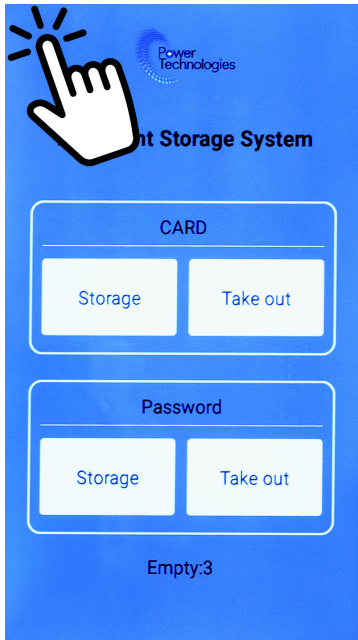


**Step-2:** Enter your Admin Password

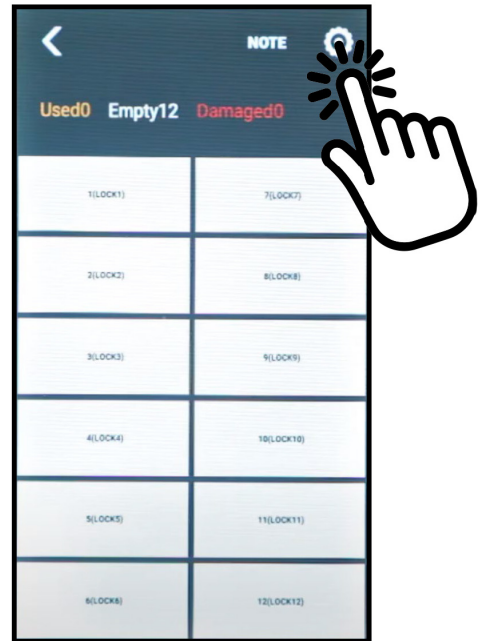

**Step-3:** Press the Bay you would like to modify

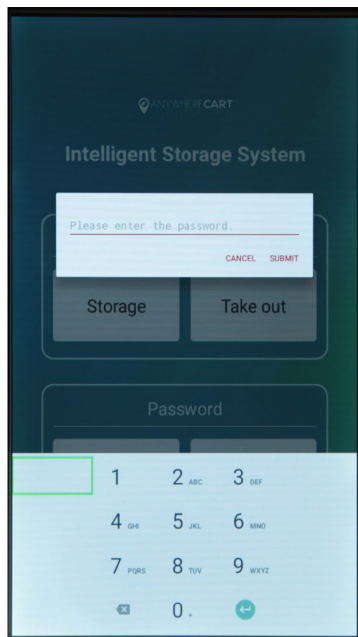

**Step-4:** Adjust parameters

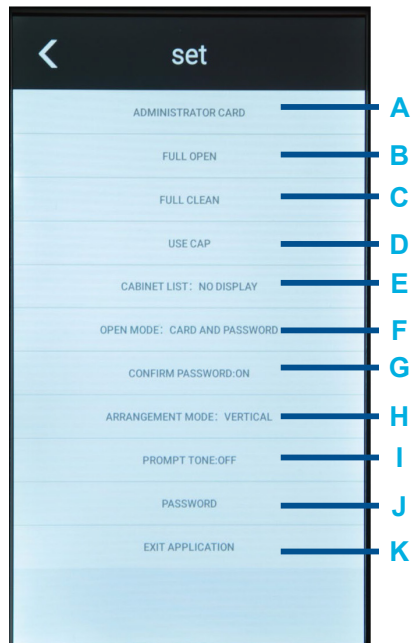

**A-** ADMINISTRATOR CARD Sets up a master access card

**E-** CABINET LIST Toggles view of Bay Number

**I-** PROMPT TONE Toggles Voice Alert

**B-** FULL OPEN Opens all Bays at once

**F-** OPEN MODE Allows for both Card & Password

**J-** PASSWORD Changes Admin Password

**C-** FULL CLEAN Clears All Bay Access Data

**G-** CONFIRM PASSWORD Toggles confirmation of password


**K-** EXIT APPLICATION PLEASE AVOID! Exits Android App

**D-** USE CAP Allows user to access up to 3 Bays

**H-** ARRANGEMENT MODE Sets Locker to either Vertical or Horizontal layout

## The power is out and I need access

Open the Upper and Lower Access Door Lock with key. Then, Push down on each Release lever to open Bays.

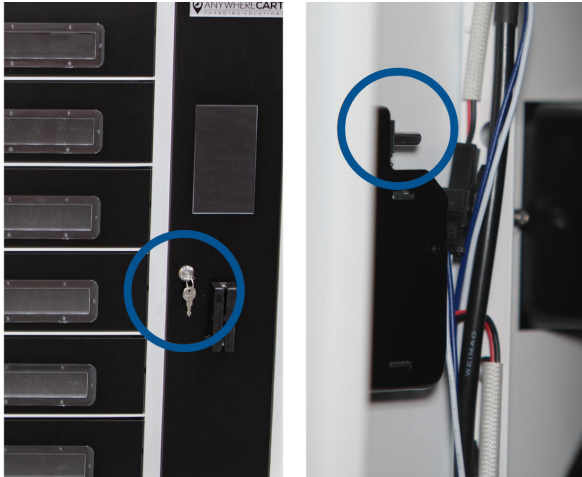


## I don't see the main menu.

Screen Saver activated; Press the screen.




## A User no longer remembers password

Follow the instructions for Single Open, then Single Clean on page 34

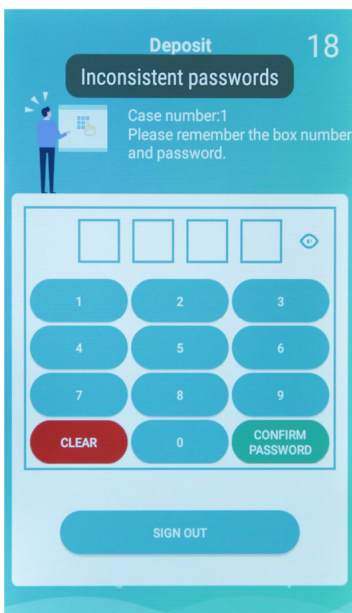

## Someone exited the App

Press the Android Home Button Then Press "Cabinet" App icon

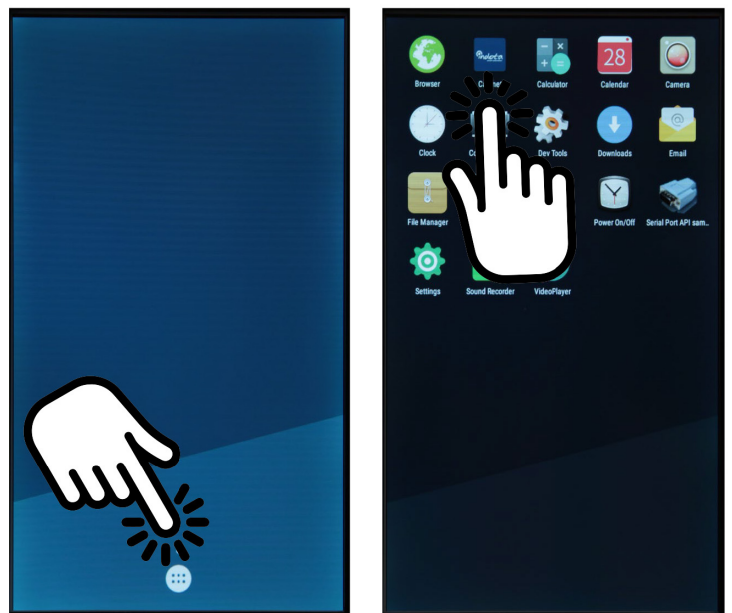





## Background management :

Long press the upper left corner or the powertechnologies logo and the following picture will appear, enter the management password or use the management card, click SUBMIT to enter the setting page. (See section on setting Admin card or password for detailed instructions)


## The settings are as follows:

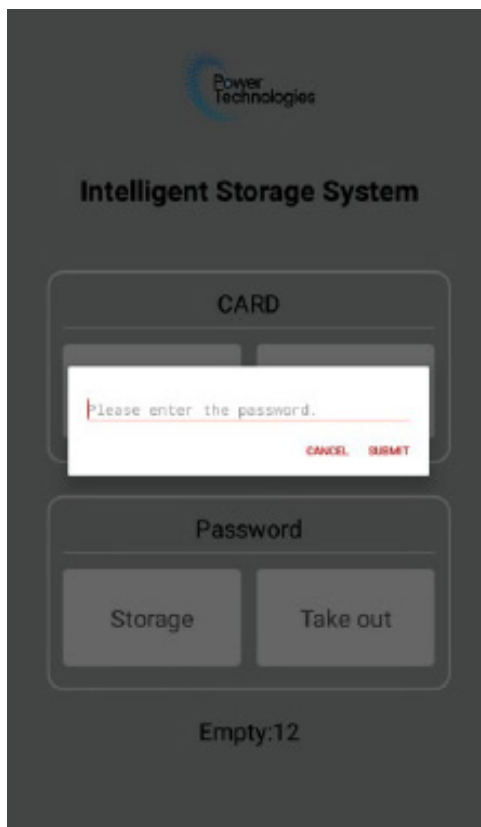

1. Used: used quantity; Empty: unused quantity; Damaged: Damaged quantity
2. Click on the locker in the list to pop up the operation menu.  
In different modes, the corresponding operation menu options, see "Mode"
3. Click "note" to enter the record page.
4. Click, enter the detailed setting page.

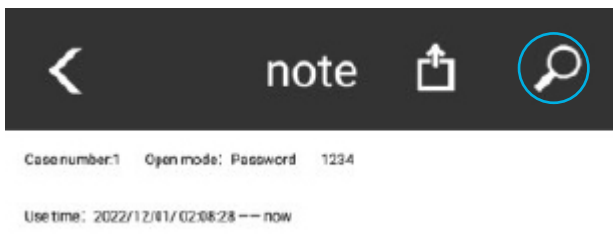


**Step-1:** Click search icon, filter the record list.

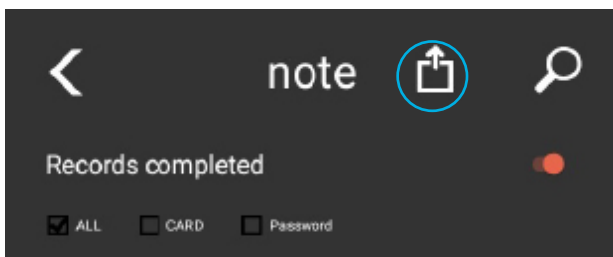

- 1) Records completed: Whether to display the records of the completed access process.
- 2) ALL CARD Password: Filter by access method.

**Step-2:** Click on the above circled icon , if it is connected to Wi-Fi, enter the email address to share and share it (Note: Basic settings->EMAIL needs to be configured)

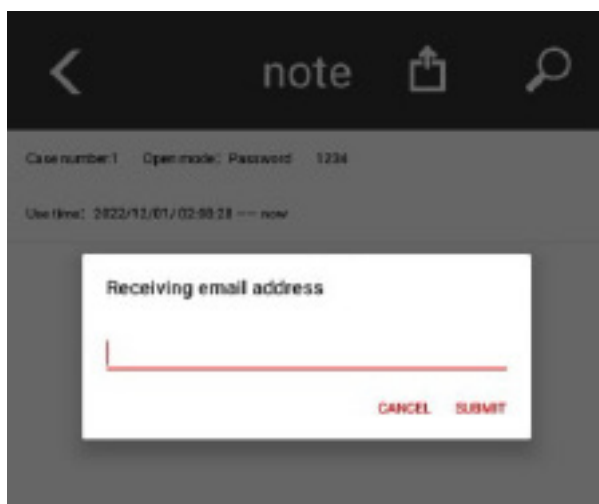

## ADMINISTRATOR CARD

Shows code of Admin card and allow access to add additional admin cards.

## FULL OPEN

Opens all bays and maintains last setting for each bay

## CABINET LIST: NO DISPLAY

Used for assignment of bays.

- No display – offers next available bay
- Display – user can select the bay they want

## OPEN MODE

Define is it can only be opened with a card or with card and password.

## CONFIRM PASSWORD – YES / NO


Require user to enter password once or second time to confirm.

## BASIC SETTING: BACKGROUND

Select different background option.

## EXIT APPLICATION

Exits the locker control application to the Android tablet. This provides access for file management, etc.

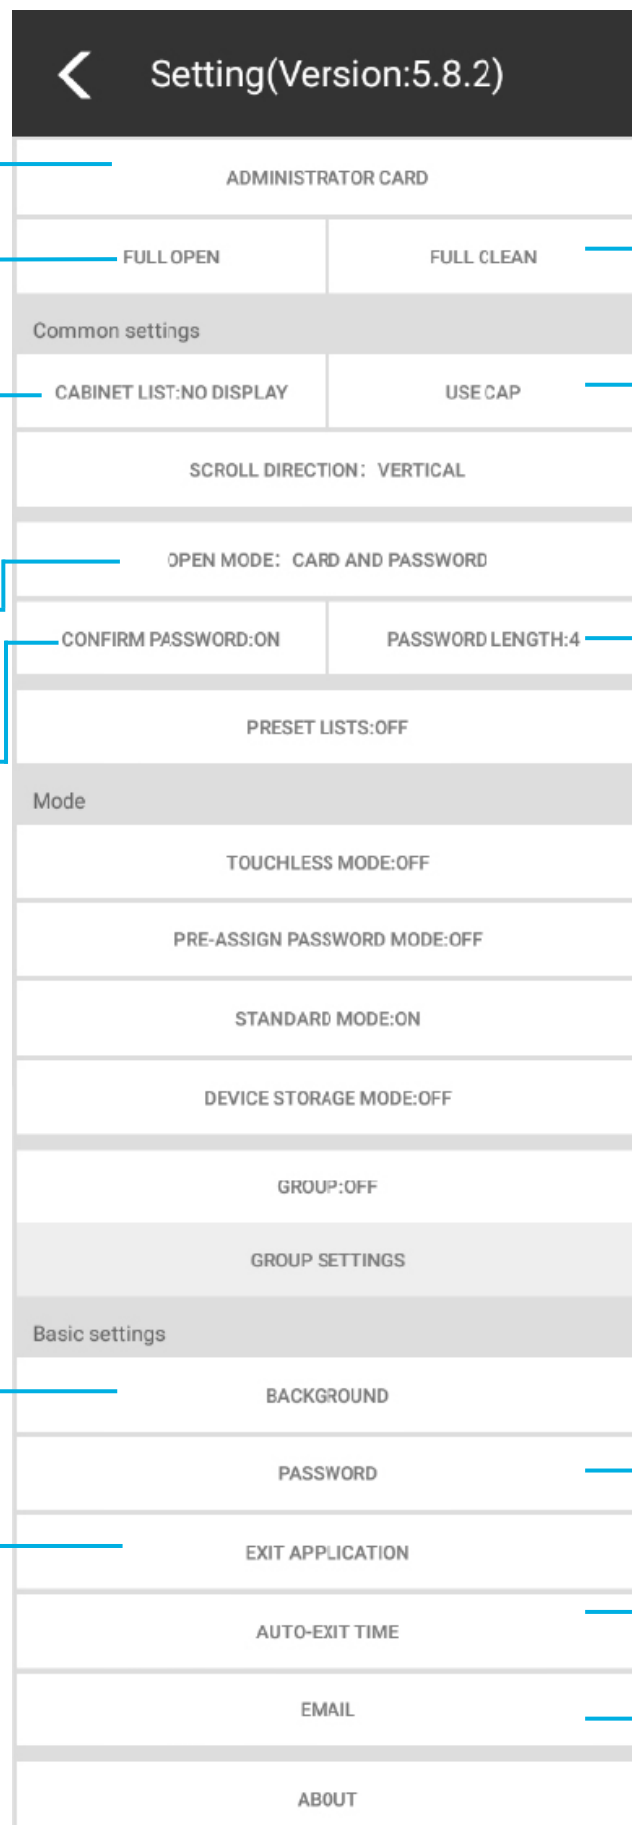

Setting (Version: 5.8.2)

- ADMINISTRATOR CARD
- FULL OPEN
- FULL CLEAN
- Common settings
- CABINET LIST:NO DISPLAY
- USE CAP
- SCROLL DIRECTION: VERTICAL
- OPEN MODE: CARD AND PASSWORD
- CONFIRM PASSWORD:ON
- PASSWORD LENGTH:4
- PRESET LISTS:OFF
- Mode
- TOUCHLESS MODE:OFF
- PRE-ASSIGN PASSWORD MODE:OFF
- STANDARD MODE:ON
- DEVICE STORAGE MODE:OFF
- GROUP:OFF
- GROUP SETTINGS
- Basic settings
- BACKGROUND
- PASSWORD
- EXIT APPLICATION
- AUTO-EXIT TIME
- EMAIL
- ABOUT

## FULL CLEAN

Opens all bays and resets last setting.

## USE CAP

Defines the maximum number of bays a customer can use 1-3.

## PASSWORD LENGTH

Set requirement for length 4,5 or 6 digits. Preset Lists

- Yes – a preset list of user id's are loaded by the admin and only those users can access the locker.

- No – anyone can access and use the locker.

## PASSWORD

Change admin password.

## AUTO EXIT TIME


Elapsed idle time before admin screen closes.

## EMAIL

Set admin email for emailing data log.

## Step-1: ADMINISTRATOR CARD

Enter this page, scan the card on the card reader, and the card information will be added automatically. Click on a piece of information in the list to delete.

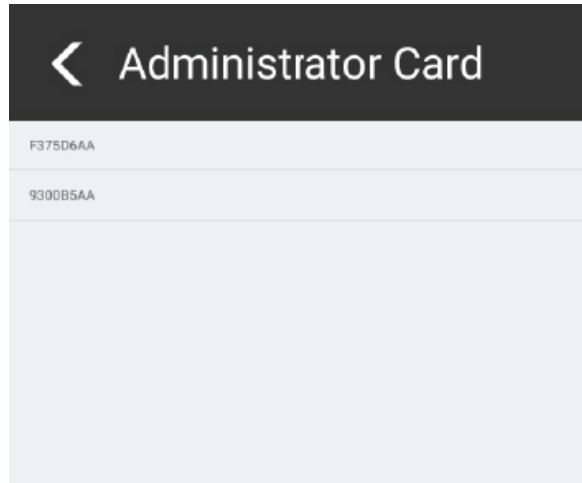

## Step-2: FULL OPEN

All locker doors will be opened, save previous setting for bay access

## Step-3: FULL CLEAR


Empty all and open locker doors, resets all passwords and settings on bay access.

## Step-4: COMMON SETTINGS

All locker doors will be opened, save previous setting for bay access


- CABINET LIST:**  
 Whether to display a selection list during the save process.
- USE CAP:**  
 Set a maximum number of lockers that can be used for a card.

- SCROLL DIRECTION:**  
 Displays the scrolling direction of the list (VERTICAL, HORIZONTAL). The picture below is VERTICAL.

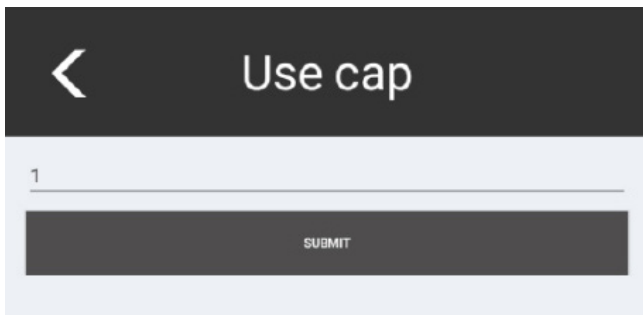



1(LOCK1)	2(LOCK2)
3(LOCK3)	4(LOCK4)
5(LOCK5)	6(LOCK6)
7(LOCK7)	8(LOCK8)
9(LOCK9)	10(LOCK10)
11(LOCK11)	12(LOCK12)
13(LOCK13)	14(LOCK14)
15(LOCK15)	16(LOCK16)

SCROLL DIRECTION: When HORIZONTAL, ARRANGEMENT MODE can be set. The picture below shows ARRANGEMENT MODE: VERTICAL

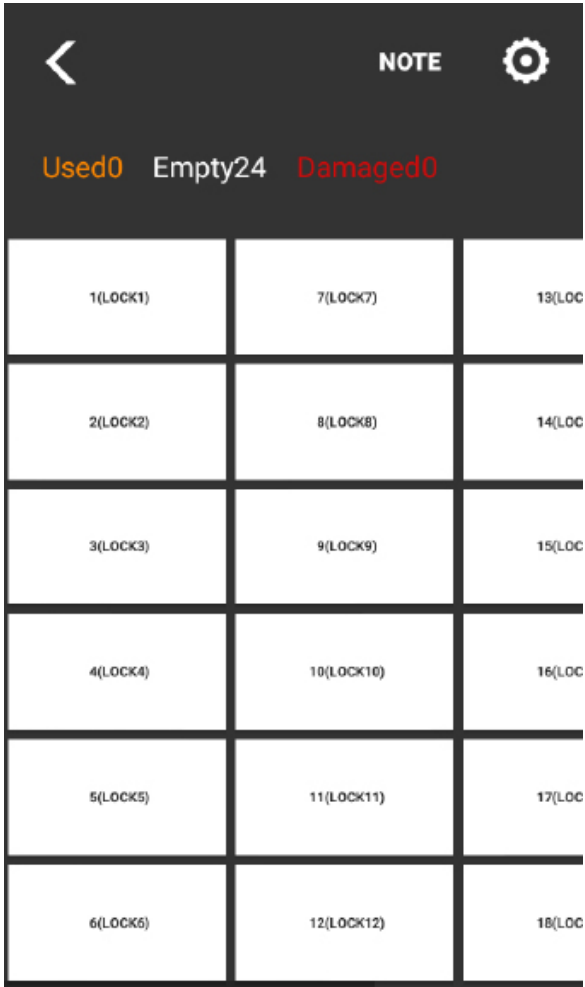

NOTE		
Used0	Empty24	Damaged0
1(LOCK1)	7(LOCK7)	13(LOC
2(LOCK2)	8(LOCK8)	14(LOC
3(LOCK3)	9(LOCK9)	15(LOC
4(LOCK4)	10(LOCK10)	16(LOC
5(LOCK5)	11(LOCK11)	17(LOC
6(LOCK6)	12(LOCK12)	18(LOC

The picture below is ARRANGEMENT MODE: HORIZONTAL

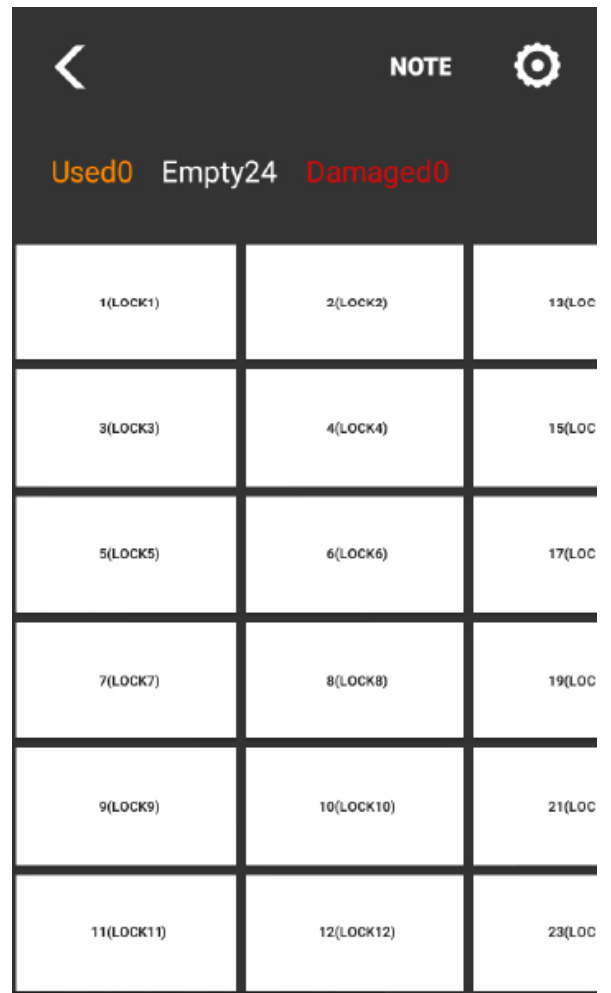


NOTE		
Used0	Empty24	Damaged0
1(LOCK1)	2(LOCK2)	13(LOC
3(LOCK3)	4(LOCK4)	15(LOC
5(LOCK5)	6(LOCK6)	17(LOC
7(LOCK7)	8(LOCK8)	19(LOC
9(LOCK9)	10(LOCK10)	21(LOC
11(LOCK11)	12(LOCK12)	23(LOC

## Step-5: OPEN MODE

CARD AND PASSWORD - CARD ONLY When OPEN MODE: CARD AND PASSWORD, you can choose whether to enter the password twice for confirmation, and you can modify the password length (password length: 4, 5, 6)

## Step-6: PRESET LISTS

Whether to use the default list When PRESET LISTS: ON, click MANAGE LISTS to edit the list, as follows:

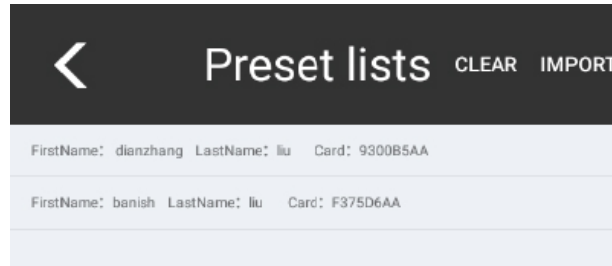


1) Click "Import": import csv file data.

(i) The name of the csv file must be: cardInfo\_file.csv  
The csv file format is as follows: (important: the card number must be obtained through the same type of card reader in the locker)


1	FirstName	LastName	Card
2	Aaron	Smith	235993AB
3	Abel	Wilson	63299AAB
4	Abraham	Johnson	532998AB
5	Adam	Jones	33C883AB
6	Adrian	Taylor	535A84AB
7	Alva	Brown	D5678623
8	Alex	Jones	E339E1AA
9	Alexander	Taylor	43D7DFAA

(ii) The csv file must be copied to this directory:  
\\YF\_XXXG\Internal storage\Android\data\com.haijie.smartiot\files\

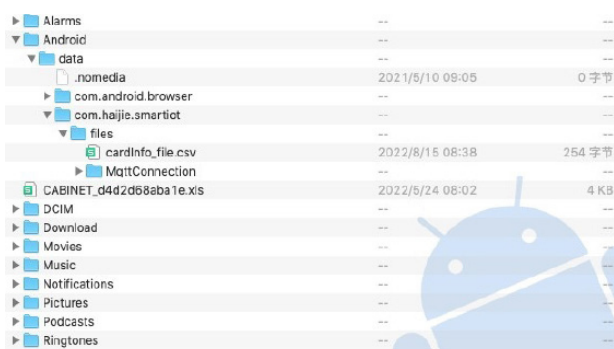


2) Click "clear": clear the list.


3) Click on an item in the list to delete it.

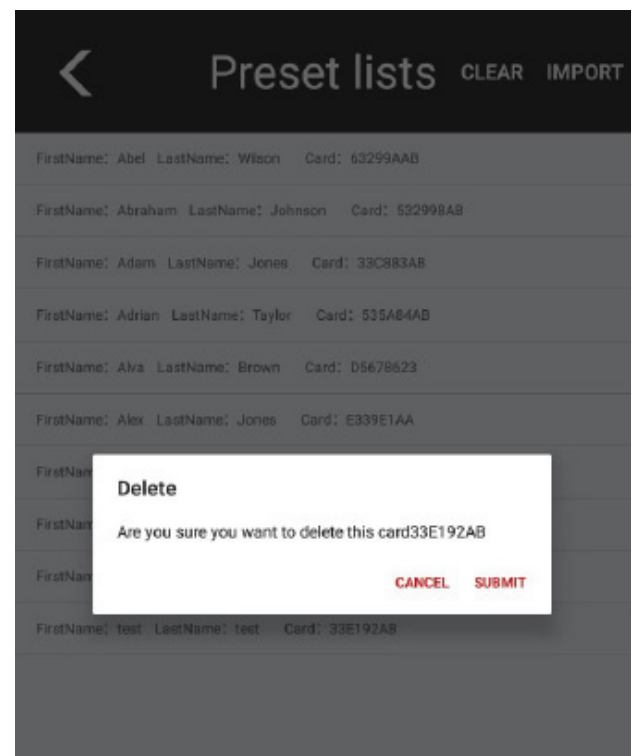

4) Swipe the card on the management page to automatically pop up the process of adding a card: enter the name to add

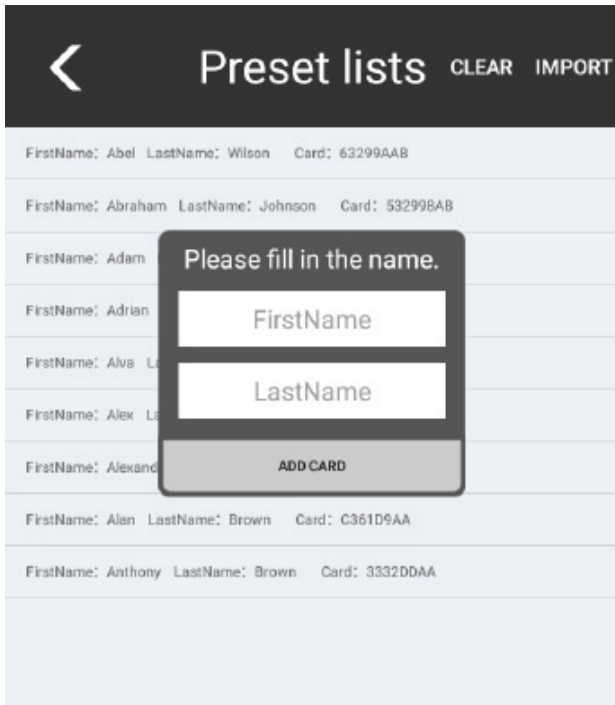


C. "123460" is a card added before opening the pre-stored list. At this time, although the card information is displayed, it will not be enabled  
 D. Click "IMPORT" to enter the pre-stored list selection page

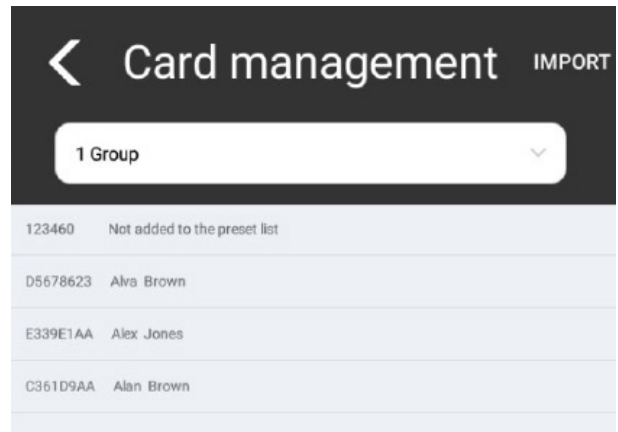


5) The pre-stored list is turned on, and the relevant settings under each Mode


1. STANDARD MODE
  - 1.1) GROUP: OFF, no need to set
  - 1.2) GROUP: ON

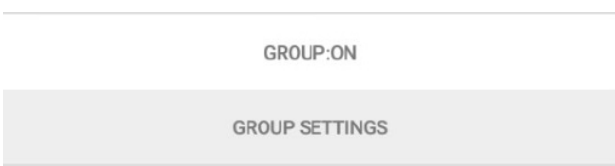


E. Click List Data. If the card is not used, it will be selected, click "IMPORT" to add the selected card to the selected group

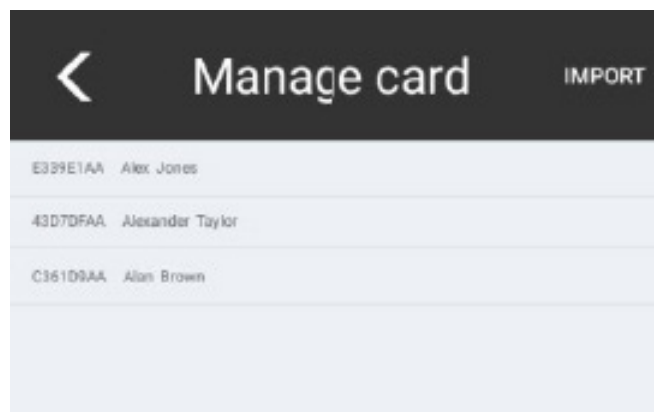

- A. Click "GROUP SETTINGS"
- B. Click "CARD MANAGEMENT"

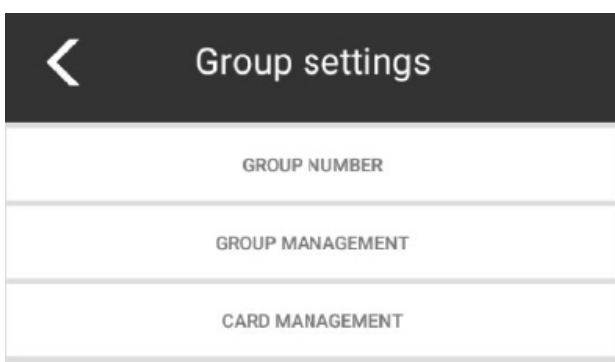

2. Click the list data, if the card is not used, it will be selected, click "IMPORT", and the selected card will be added to the selected group

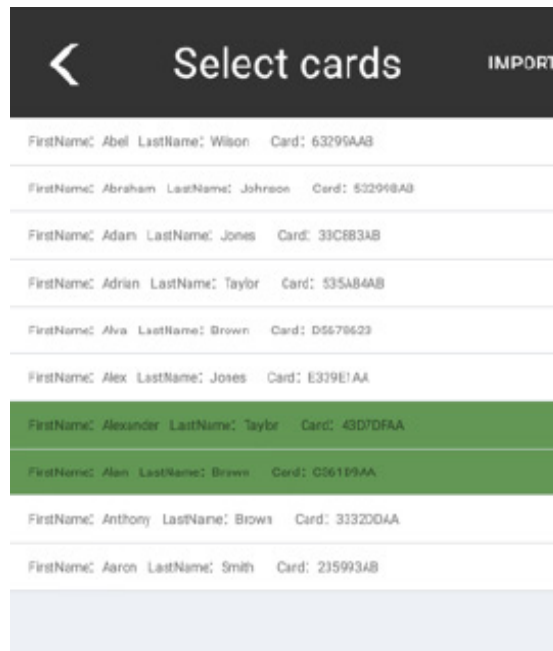

- 3. DEVICE STORAGE MODE NO NEED TO SET
- 4. TO PRE-ASSIGN - PASSWORD MODE NO EFFECT

## Step-7: BASIC SETTINGS

### 1) BACKGROUND

Modify the background

### 2) PASSWORD

Change Admin Password

### 3) EXIT APPLICATION


Exit application

### 4) AUTO-EXIT TIME

When the page is not exited, set the automatic exit time without any operation.

### 5) EMAIL

On the outbox authorization page, fill in the outbox address and authorization code.

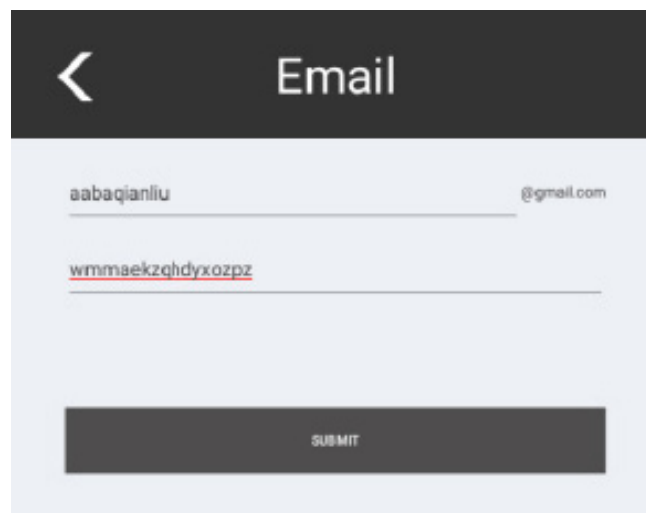



Thank you for choosing the Power Technologies AC/SC/CSC-LOCKER Series Charging Lockers.

The Firmware controlling your Locker may be out of date and can be updated easily by following all the steps in this guide.

Please review this guide entirely before starting the update process.

Contact [Support@PowerTechnologies.com](mailto:Support@PowerTechnologies.com) for the Firmware Download Link

---

## REQUIRED ITEMS

---



NEW FIRMWARE FILE .APK




PC OR MAC LAPTOP




6' USB TO MICRO-USB CABLE


**Step-1:** Press & hold the top left corner for 3 seconds

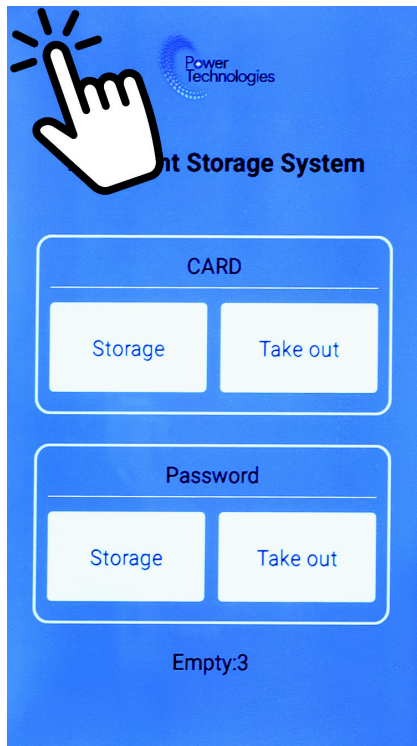


**Step-2:** Enter the Admin Password or scan your Administrator Card

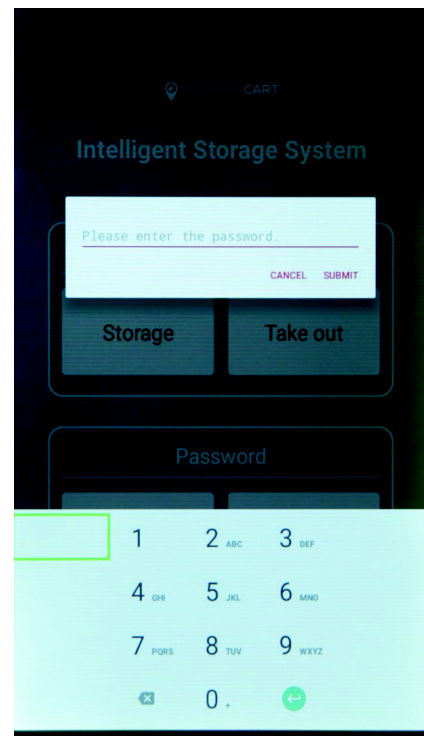

**Step-3:** Access settings by pressing "Gear" icon

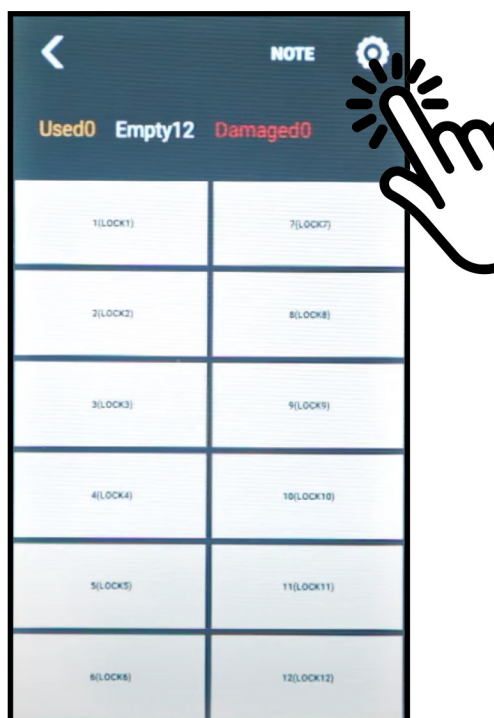

**Step-4:** Press "EXIT APPLICATION"



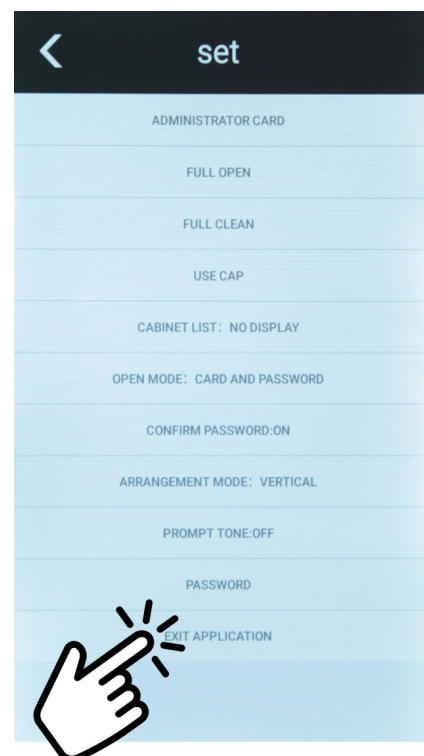


# Un-Installing the App

**Step-5:** Open the system settings

**Step-6:** Click on the apps to get your pre-installed application.




**Step-7:** Open up the cabinet app.

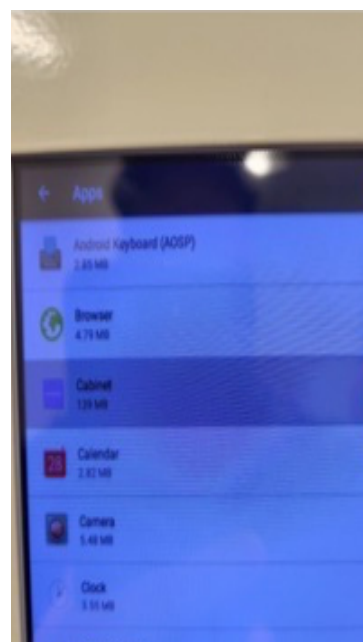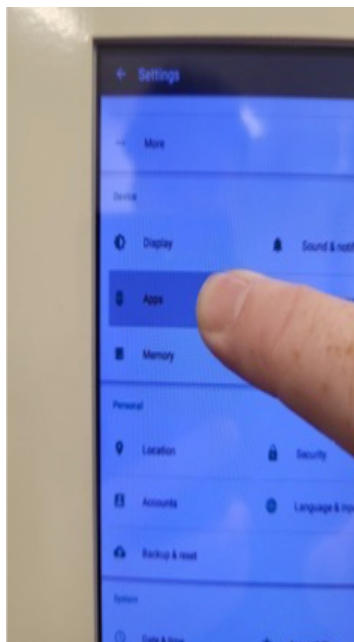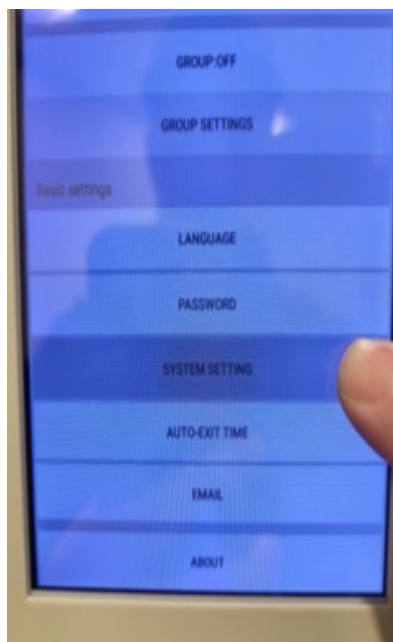

**Step-8:** Uninstall the cabinet application

**Step-9:** Press the Android Home Button

**Step-10:** Screen should look like this

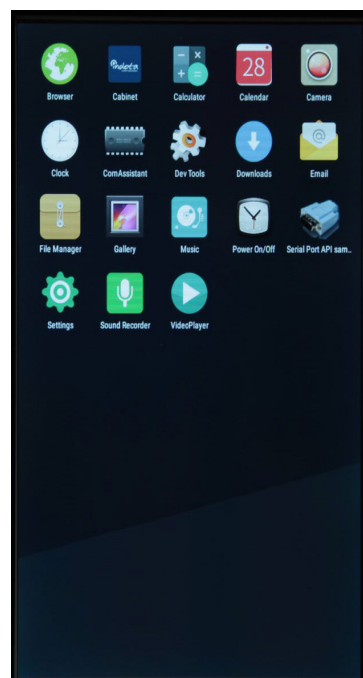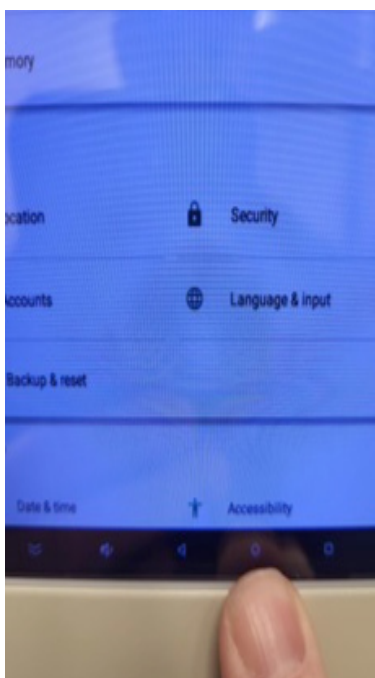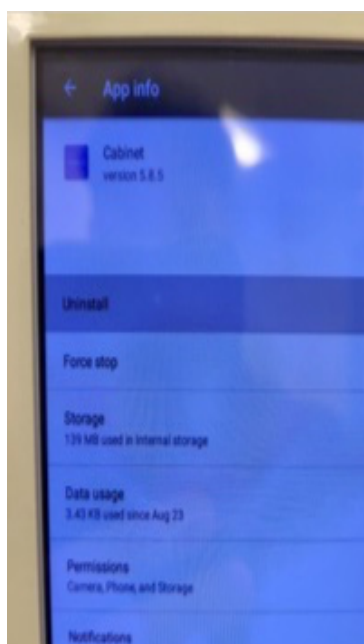


# Connecting A Laptop

Screen On the Upper Cabinet of your Locker, insert key into Lock and open door.


Locate the micro-USB Port on top of the Touch Screen and attach Micro USB cable from Laptop to the Locker.




**Step-1:** From your Laptop, select the connected “YF\_\*\*\*\*” Device, then press “Internal Storage”.

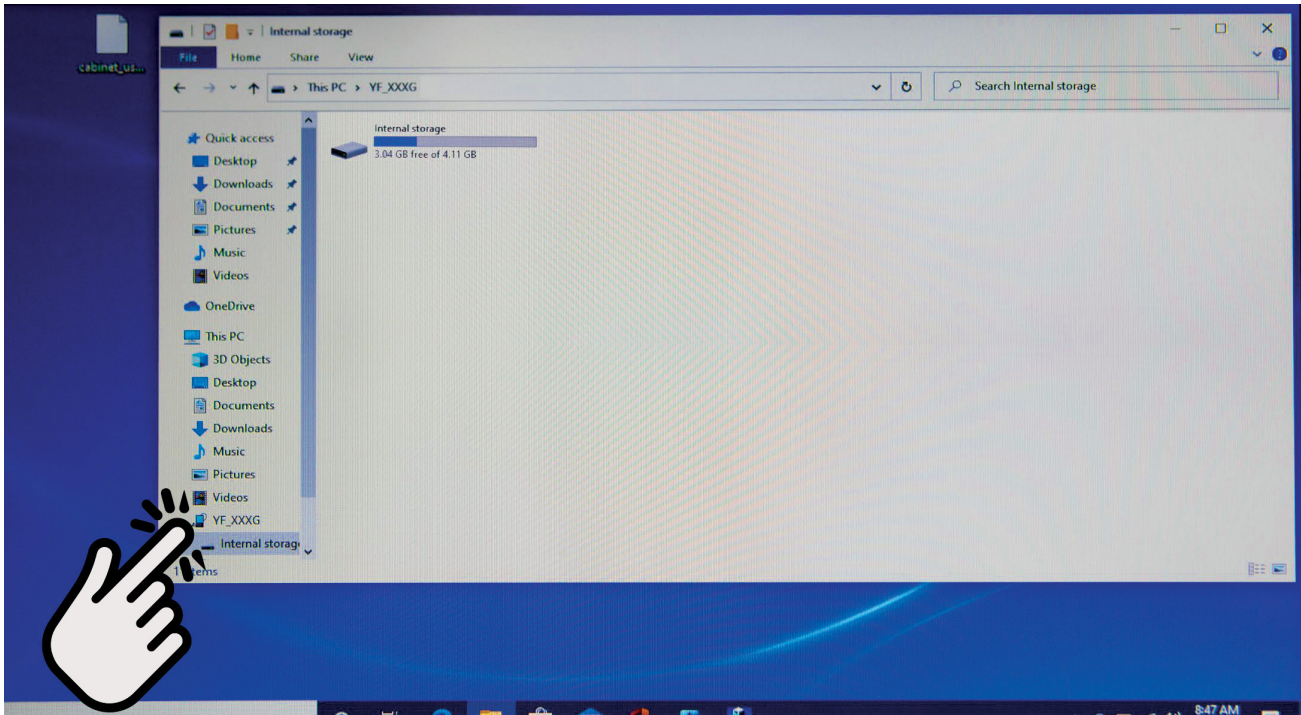


**Step-2:** Drag and drop the new firmware file from your Laptop to the Internal Storage of the Device.

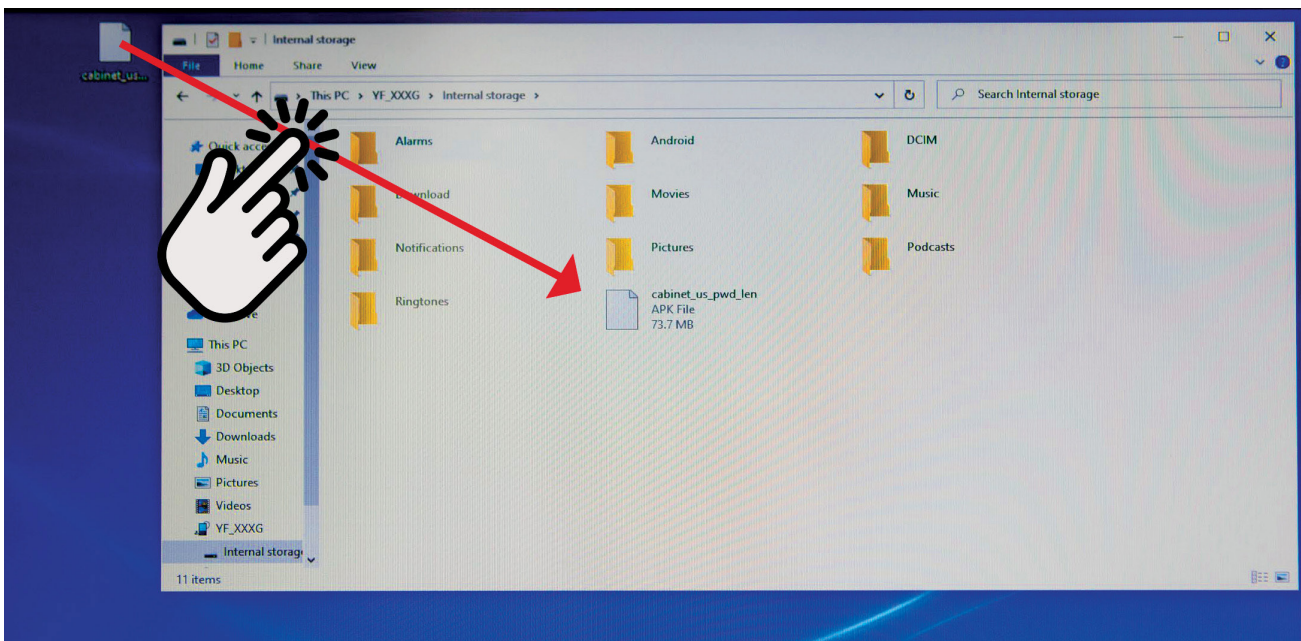


**Step-3:** From the Locker, press the “File Manager icon

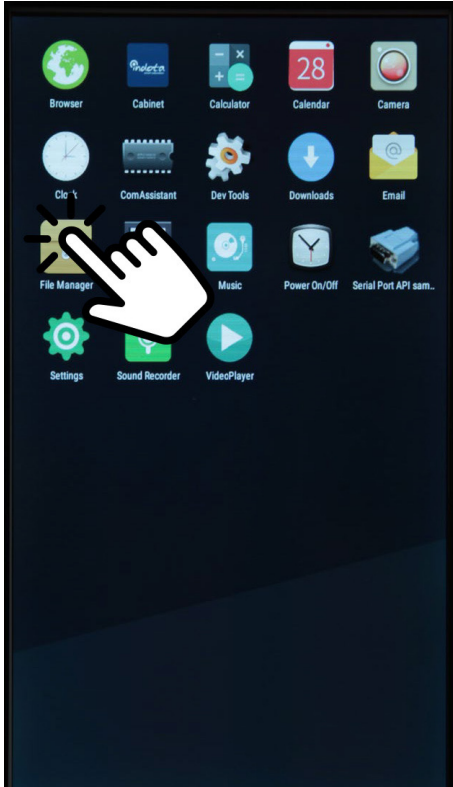


**Step-4:** Press the new firmware file

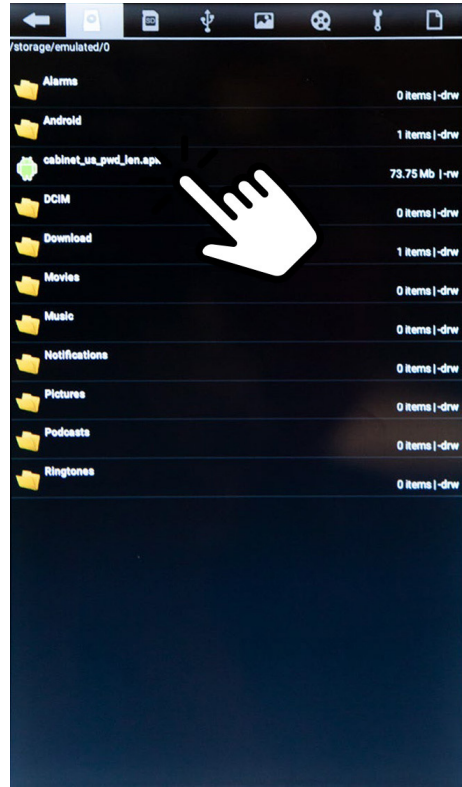

**Step-5:** Installation will begin

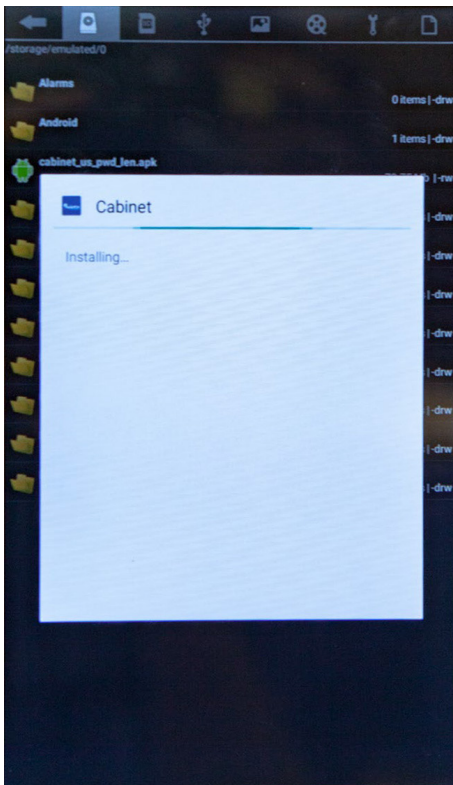

**Step-6:** Once complete, locker is ready to use

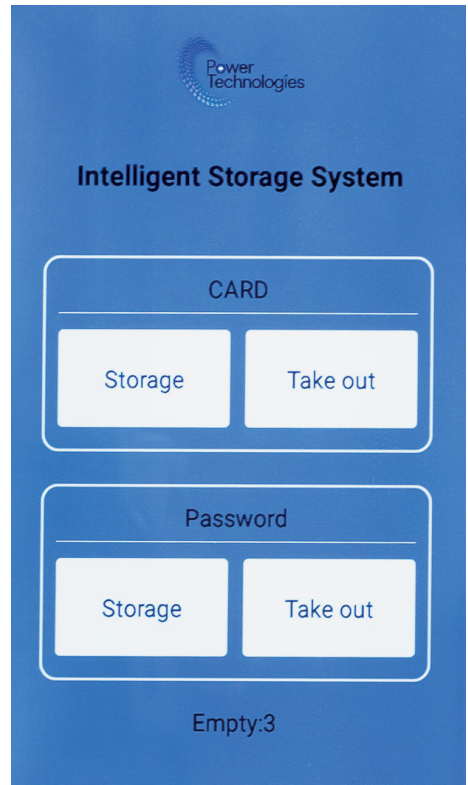

**For further information on this product and others, contact Power Technologies at.**

Power Technologies  
42035 Zevo Dr  
Temecula, CA 92590+  
888.650.4488

[support@powertechnologies.com](mailto:support@powertechnologies.com)

[www.powertechnologies.com](http://www.powertechnologies.com)

---